


Ponzio SLI200TT

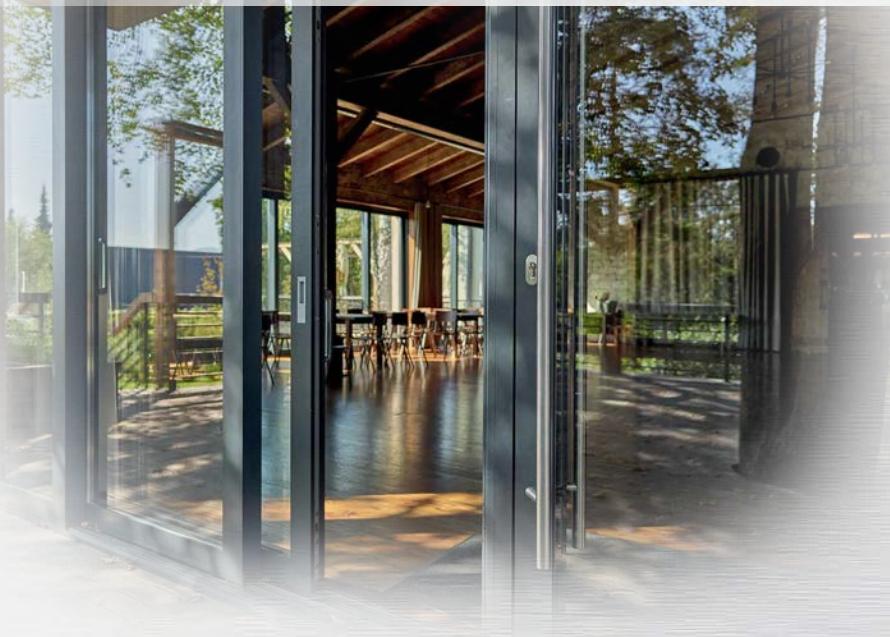

Filling thickness	»	6 - 37 mm
Sash depth	»	50 mm
Frame depth	»	120 mm two-rail frame 184 mm three-rail frame
Filling type	»	single glazing, IGUs and non-transparent panels,
Maximum sash dimensions	»	L 2000 x H 2300 mm
Maximum sash weight	»	250kg
Air permeability	»	class 3
Watertightness	»	class 7A
Resistance to wind load	»	class B3
Thermal insulation	»	U_f from 3.4 W/m ² K U_w from 1.9 W/m ² K ($U_g=1.0$)
Certification	»	ITT in acc. with EN 14351-1 + A1

- interconnected with other Ponzio systems
- low threshold solution available
- two- to three-rail frames